


CLASSIFICATION (CANCELED) (~~CHANGED TO~~
) BY AUTHORITY OF
 NAVAIR AIR-960
 ON 8/12/75 *S. J. Waller Sec. Spec.*
 (DATE) (SIGNATURE) (RANK)
 NAVAL AIR SYSTEMS COMMAND
 DEPARTMENT OF THE NAVY

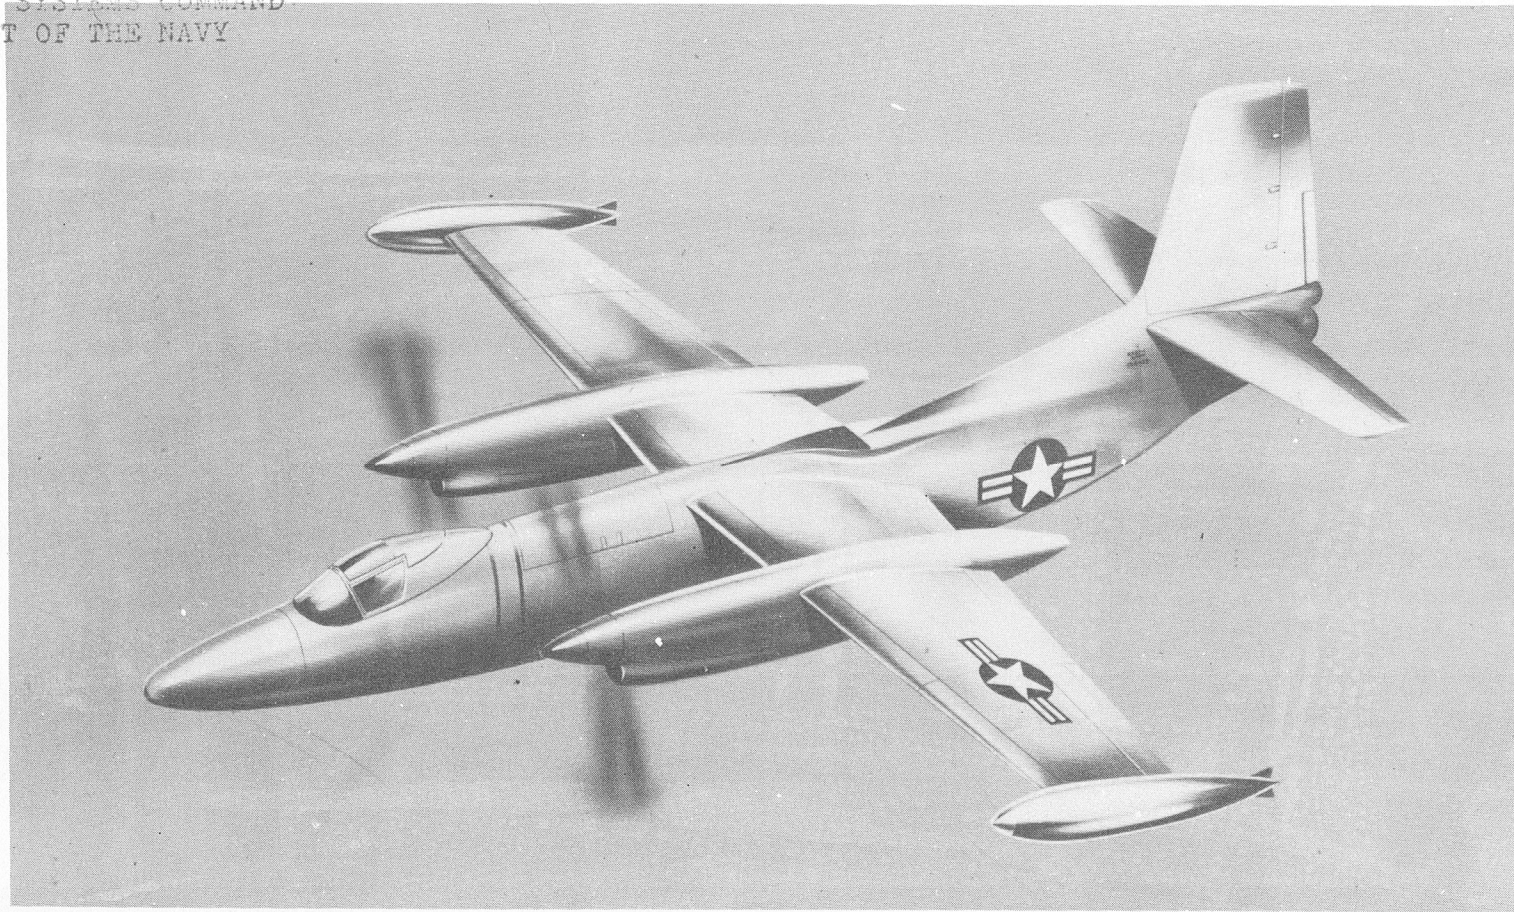

23

STANDARD AIRCRAFT CHARACTERISTICS


XA2J-2

NORTH AMERICAN

DECLASSIFIED

BUREAU OF AERONAUTICS
NAVY DEPARTMENT

WING AREA - 950.5 SQ. FT.
WING SECTION - NACA 64A-012
M.A.C. - 157.27 IN.
ASPECT RATIO - 6.0
PROP - AEROPRODUCTS
PROP. DESIGN NO. - D40-198-6


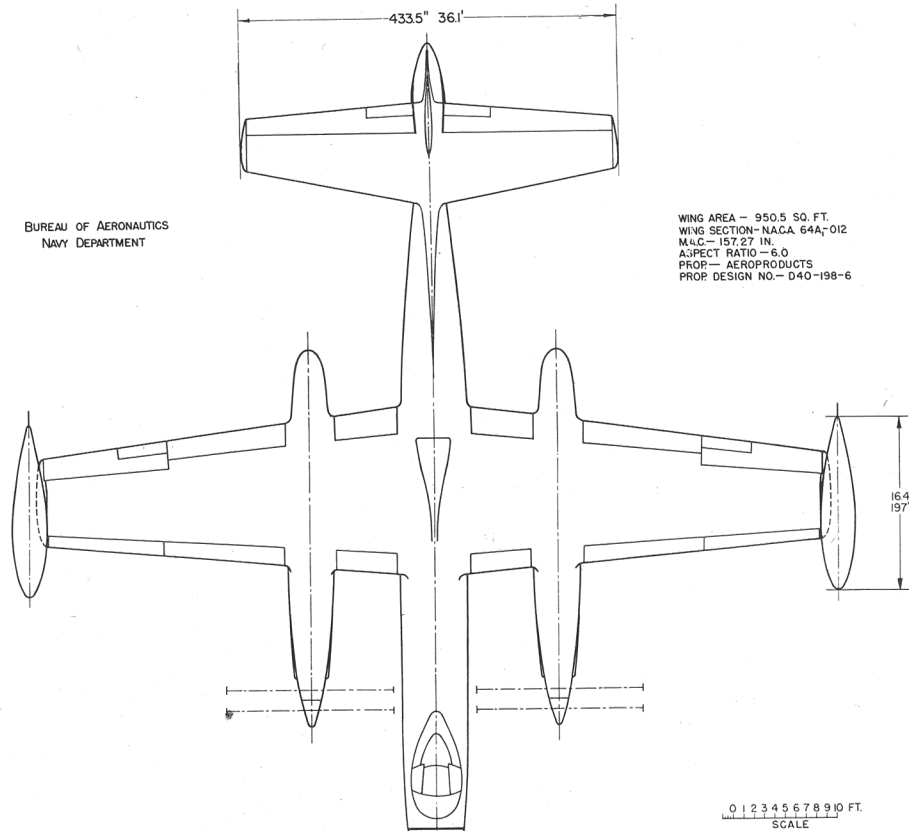


BUREAU OF AERONAUTICS
NAVY DEPARTMENT

▨ SELF-SEALING TANKS
⊗ NON SELF-SEALING TANKS

WEIGHTS
OIL TANKS 36 LB
SELF-SEALING CELLS 1386 LB
TIP TANKS 672 LB

FUEL TANK CAPACITY
MAXIMUM INTERNAL 2,421 GAL
MAXIMUM 3,519 GAL

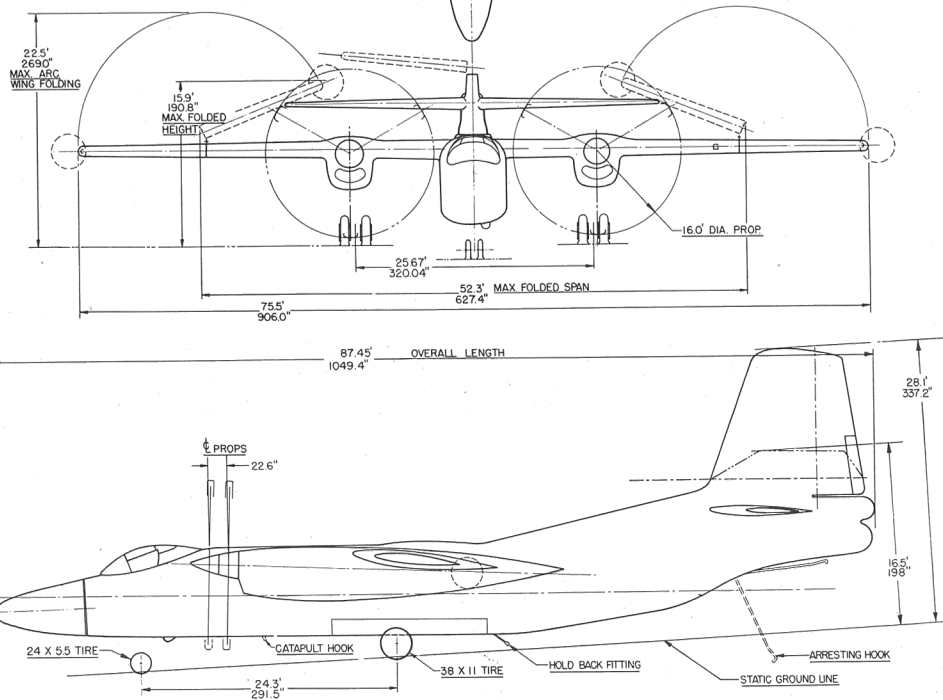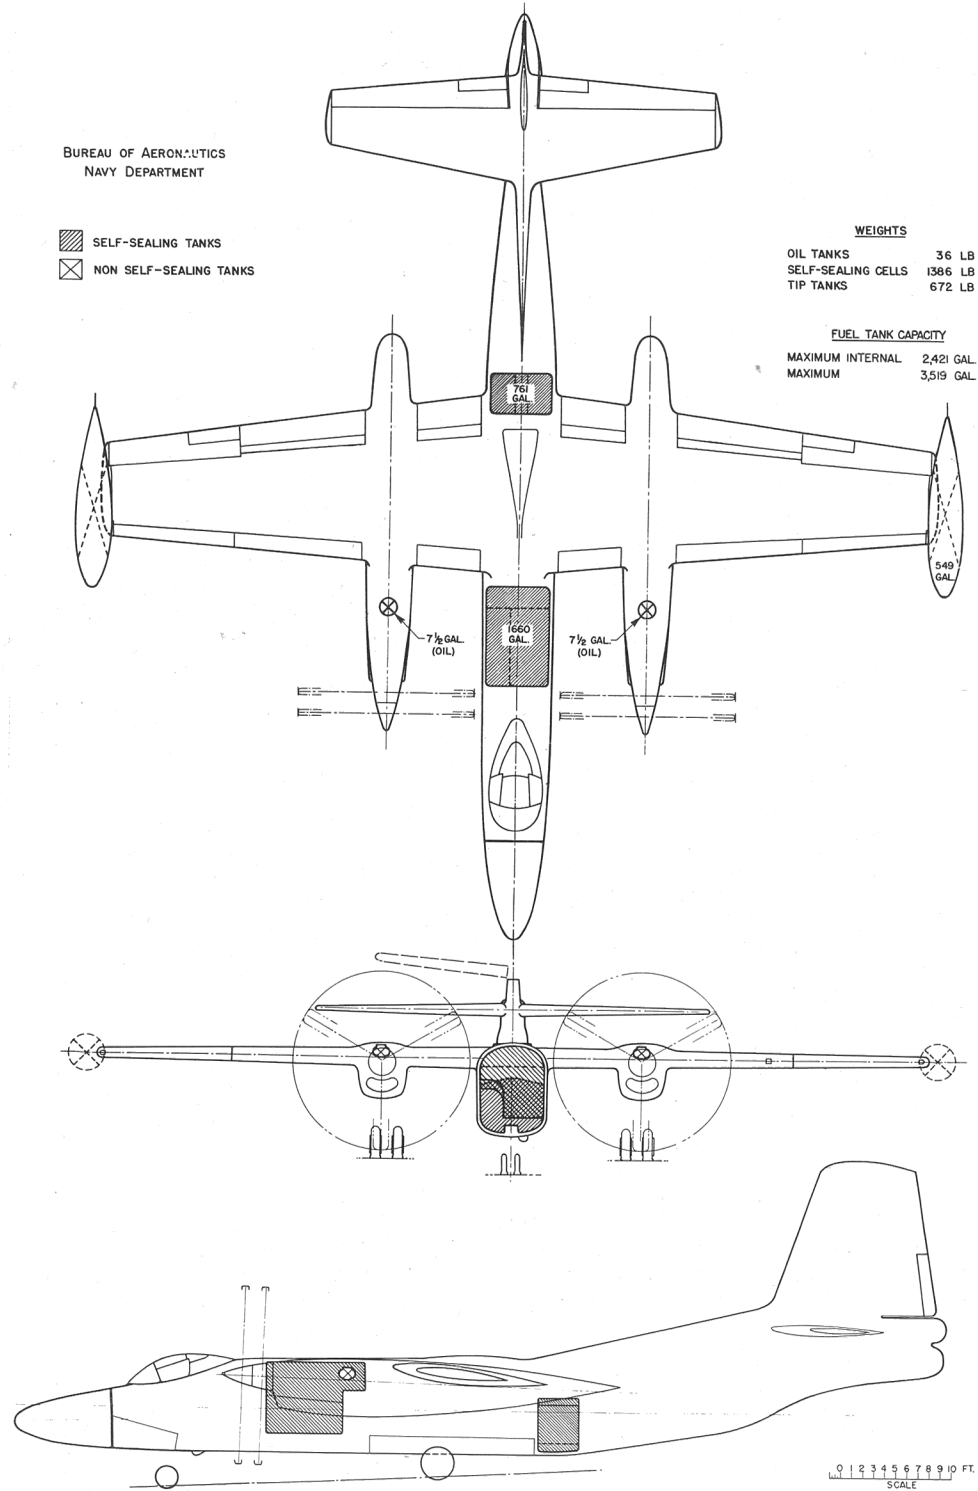

DECLASSIFIED

MISSION AND DESCRIPTION

The primary mission of this airplane is attack.

It is a three-place airplane capable of take-off with or without catapult aid from the deck of a CVB Class aircraft carrier or landing field, and landing in an arresting gear or on a landing field.

Provisions are made for folding outer wing panels and for droppable wing tip tanks. Double slotted trailing edge flaps, and nose flaps, are fitted.

The tail is conventional except provisions are made for folding the vertical tail to decrease storage space.

The fuselage provides for crew, equipment, bombs, and a turbo-jet engine. Pilot's seat only is of the ejection type.

The controls are operable by the pilot only. Power boost is provided for ailerons, elevators, and rudder, but it is possible to fly and land the airplane safely with the boosts inoperative.

Equipment for pressurizing, heating, and cooling cabin air is provided.

DIMENSIONS

WING AREA.....951 sq. ft.
SPAN.....75'-6"
LENGTH.....87'-5"
HEIGHT.....28'-1"
TREAD.....25'-8"
PROP. CLEAR.....17"
M.A.C.....13'-1"

WEIGHTS

Loadings	Lbs.	L.F.
EMPTY.....	37,502.....	
BASIC.....	38,617.....	
DESIGN.....	67,024.....	2.5
COMBAT.....	53,762.....	3.25
MAX.T.O.....	71,500.....	2.25
MAX.LAND.....	71,500.....	

All weights are estimated.

FUEL AND OIL

Gals.	No. Tanks	Location
1,660	1*	Fuse., Fwd.
761	1*	Fuse., Aft.
1,098	2	Wing Tip
* Self-Sealing		
FUEL GRADE.....100/130		
FUEL SPEC.....AN-F-48		

OIL

	J33	XT40
CAPACITY (Gal.)	3	15
GRADE.....	1010	M
SPEC.....	AN-O-9	AN-O-3

ELECTRONICS

VHF COMM. EQUIP.....AN/ARC-1A
HOMING REC.....AN/ARR-2A
IFF.....AN/APX-6
ALTIMETER.....AN/APN-1
RANGE REC.....AN/ARC-5
HF REC.....AN/ARR-15
HF TRANS.....AN/ART-13

DECLASSIFIED

POWER PLANT

NO. & MODEL.....(2) XT40-A-8
(1) J33-A-12
MFGR.....Allison
PROP. GEAR RATIO.....15.6:1
PROP. MFGR.....Aeroproducts
PROP. DES. NO.....D40-198-6
NO. BL./DIA.....6/16 ft.

RATINGS

All ratings are S. S. L.

Shp / Lbs. @ Rpm

Allison XT40-A-8 Turbo-Prop:

T. O. 7,070 1,075 13,620

MIL. 7,070 1,075 13,620

NORM. 5,870 1,025 13,620

SPEC. NO. 272-A

Allison J33-A-12 Turbo-Jet:

T. O. (dry) 5,850 11,800

MIL. 5,850 11,800

NORM. 4,800 11,200

SPEC. NO. 275

ORDNANCE

GUNS - None


BOMBS

Type	Size	Location	No.
Bomb	100 #	Fuselage	16
Bomb	250 #	Fuselage	12
Mine	450 #	Fuselage	12
Bomb	1,000 #	Fuselage	8
Bomb	1,600 #	Fuselage	6
Bomb	2,000 #	Fuselage	4
Mine	Mk. 25	Fuselage	3
Mine	Mk. 39	Fuselage	2
Mine	Mk. 10-8	Fuselage	2

FIRE CONTROL

Bomb Director.....Mk. 5

MAXIMUM BOMB LOAD....12,000#

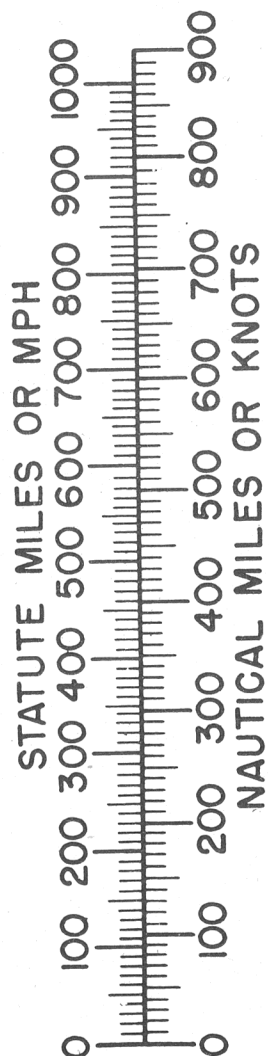





PERFORMANCE SUMMARY

LOADING CONDITION	(1) ATTACK 10,500 # Bombs 2-548 Gal. Tip Tanks		(3) ATTACK 10,500 # Bombs	
	TAKE-OFF WEIGHT	lbs.	71,500	
Fuel	lbs.	14,526/6,588		14,526
Bombs	lbs.	10,500		10,500
Wing/Power Loading (A)	lbs/sq.ft;lbs/bhp.	74.7/-		67.1/-
Stall Speed--Power off	kn.	104		98.4
Stall Speed--Power off - No Fuel	kn.	87.1		86.6
Stall Speed--Power on	kn.	93.5		88.5
Maximum Speed/Alt (B)	kn/ft.	396/22,000		404/23,000
Take-off Distance, deck -- calm (D) ft.		1,415(1,105)		1,067(846)
Take-off Distance, deck 25 kn.Wind(D)ft.		786(625)		568(450)
Take-off Distance, Airport	ft.			
Rate of climb -- sea level (B)	ft/min.	3,250		3,600
Service Ceiling (B)	ft.	38,000		39,400
Time-to-climb 20,000 ft. (B)	min.	8.0		7.0
Time-to-climb 30,000 ft. (B)	min.	13.8		12.9
Combat Range/V av (C) ft. n.mi/kn.		2,360/368		1,650/368
Combat Radius/V av (C) ft. n.mi/kn.		1,230/368		820/368
LOADING CONDITION	(2) COMBAT	(4) COMBAT	(5) COMBAT	
GROSS WEIGHT	lbs.	53,762	53,762	53,762
Engine power	Mil. with Jet	Mil. W.O. Jet	Nor. W.O. Jet	
Fuel	lbs.	14,526	14,526	14,526
Bombs/Tanks		None	None	None
Max. speed at sea level	kn.	454	400	372
Max. speed/Alt	kn/ft.	468/14,000	427/22,000	411/24,000
Combat speed/Alt	kn/ft.	441/35,000	417/35,000	406/35,000
Rate of climb SL	ft/min.	7,500	5,650	4,750
Ceiling for 500 fpm R/C	ft.	46,000	42,000	40,600
Time-to-climb/Alt.	min/ft.	5.9/30,000	8.1/30,000	9.5/30,000

NOTES

- (A) BHP at Maximum Critical Altitude
 (B) Normal BHP
 (C) All Cruise Calculated at NRP
 (D) Figures in Parenthesis are Military with Jet.

DECLASSIFIED

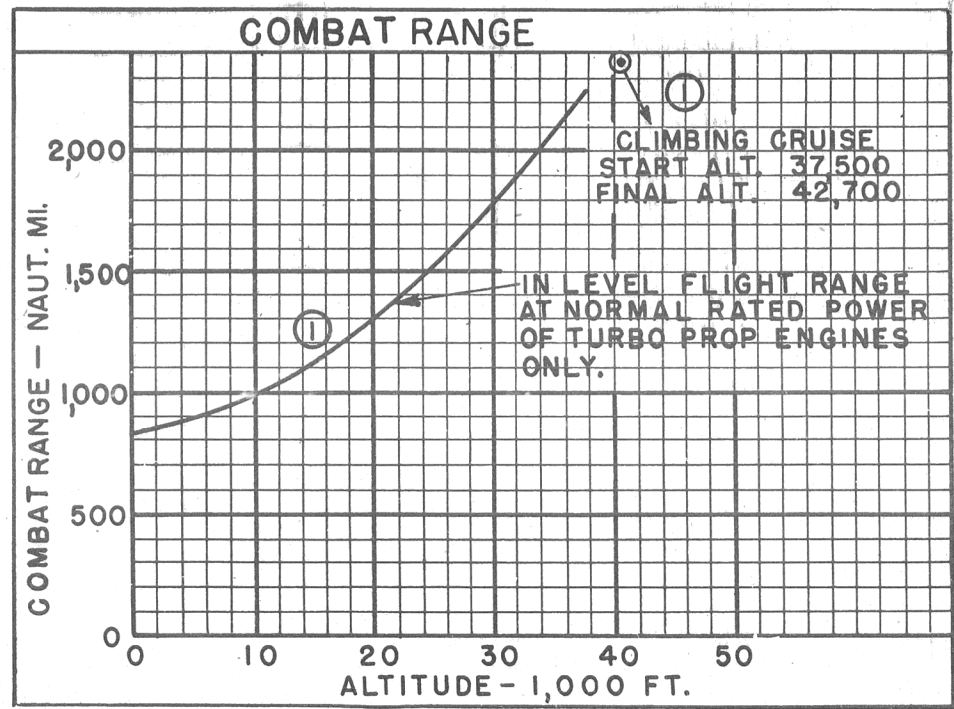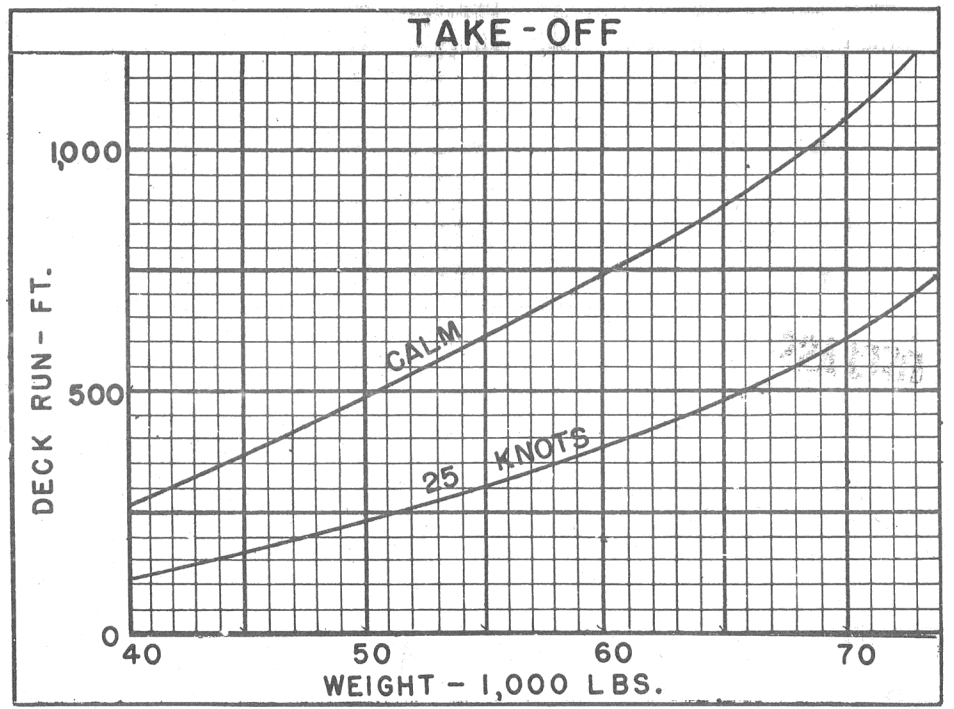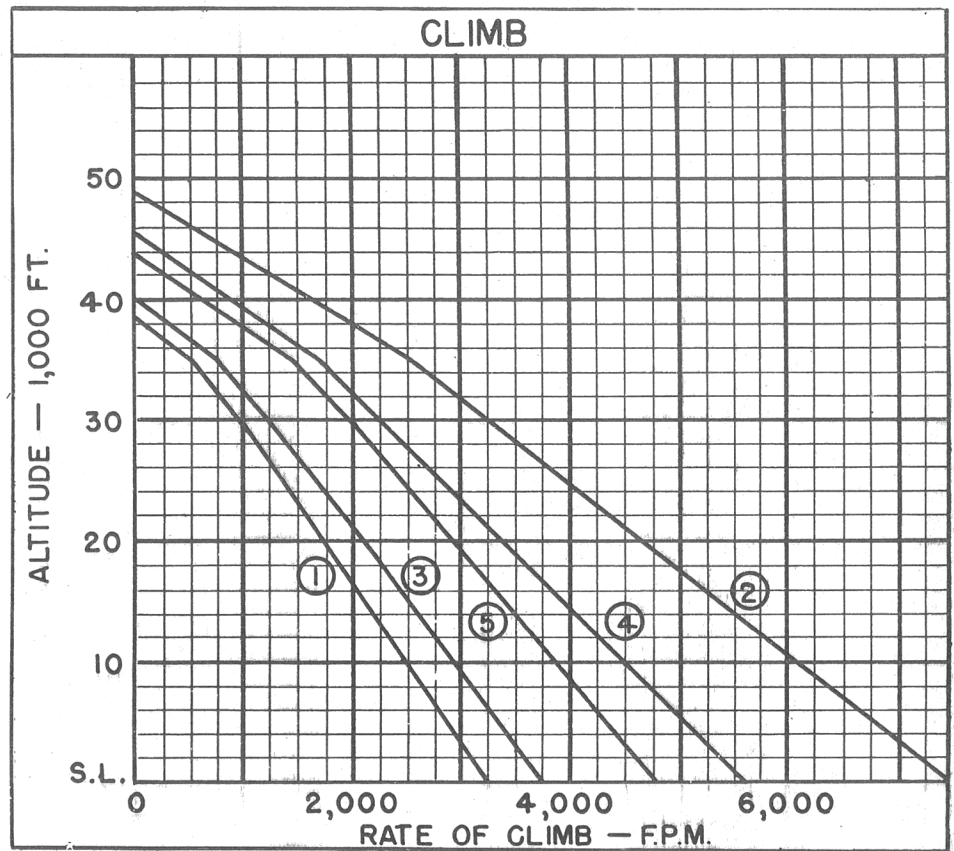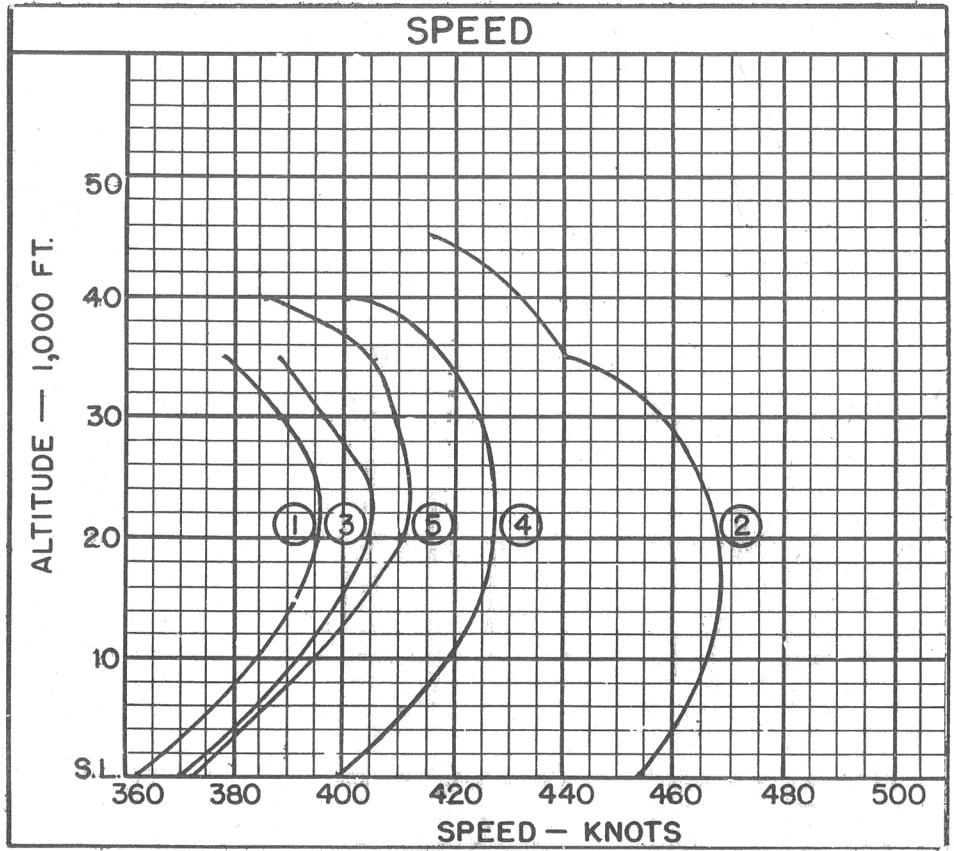

○ LOADING CONDITION COLUMN NUMBER

27

NOTES

Performance is based on calculations. Range and radius are based on engine specification fuel consumption data increased by 5%.


Provisions are incorporated for fuel transfer from droppable wing tip tanks to internal tanks.

COMBAT RADIUS PROBLEM NO. A-3


WARM-UP TAKE-OFF RENDEZVOUS	CLIMB (A)	CRUISE-OUT	DROP TANKS	CONTINUE CRUISE-OUT	RUN IN	RUN OUT	CLIMB (B)	CRUISE-BACK	RESERVE
5 min. at sea level static normal power of all engines	At max. rate with mil. power to initial cruise-out alt. (Alt. not greater than alt. for 300 ft/min. max. rate of climb with normal power.)	With optimum range operation to reach 35,000' min. alt. at not less than 100 n. mi. from target. (State altitudes and any special engine operations involved.)	Only when empty and state when dropped.	With optimum range operation at 35,000 ft. min. alt. to 50 n. mi. from target. (State any special engine operation involved.)	For 50 n. mi. at Vmax. at 35,000 ft. min. altitude with max. power available all engines. <u>DROP</u> Expendable ordnance retain amm.	For 50 n. mi. at Vmax. at 35,000 ft. min. altitude with max. power available all engines.	To optimum alt. for cruise-back alt. not greater than 300 ft./min. max. rate of climb with normal power (fuel used and distance made good).	Under optimum cruise conditions, alt. not greater than altitude for 300 ft./min. max. rate of climb with normal power (State altitudes and any special engine operations involved.)	10% of total initial fuel load.

28

$$\text{COMBAT RADIUS} = \text{CLIMB (A)} \div \text{TOTAL CRUISE-OUT} \div 50 \text{ N.MI.} = 50 \text{ N.MI.} \div \text{CRUISE-BACK} \div \text{CLIMB (B)}$$

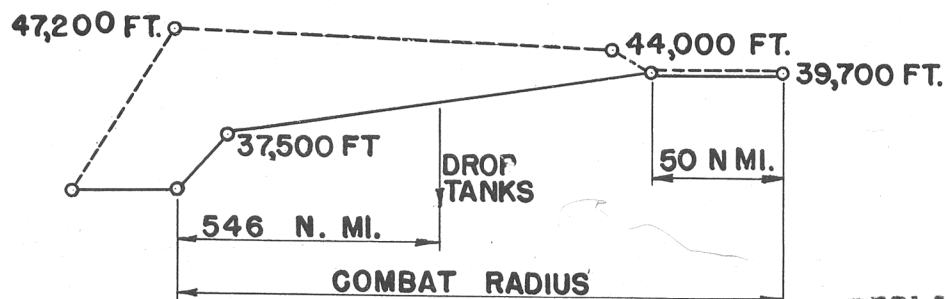

①

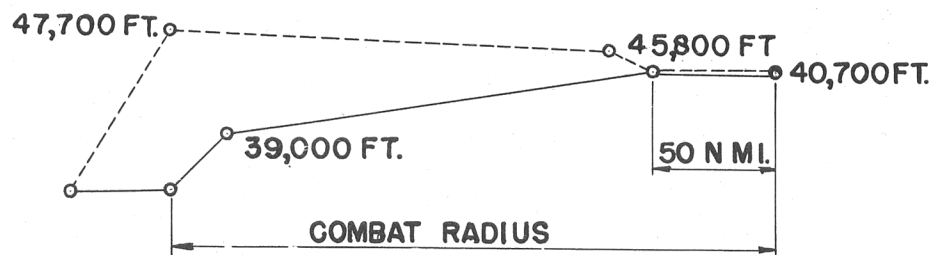

③

DECLASSIFIED